


超柔软食品管 A1-003

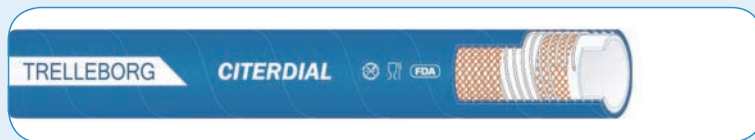

应用范围:

特别适用于输送牛奶, 主要用于奶源收集站、奶罐车、奶品加工及灌装设备等工作场合。也可用于其他流体食品的排吸, 如红酒、啤酒、果酒、果汁、食醋、96% 浓度酒精等。

优点:

- 具有非常良好的柔韧性
- 白色光滑食品级内壁, 能有效抑制细菌滋生
- 符合法国、欧洲、美国等地区最严格食品级标准
- 可用清洁剂或蒸汽消毒 (蒸汽温度不超过 +110℃, 最大可持续十分钟)
- 具有防扭结、耐磨损、耐油污等特性
- 不含 phthalate (邻苯二甲酸酯)

技术参数:

- 内层: 食品级 NR 合成橡胶, 白色, 光滑
- 增强层: 高强度合成线绳加螺旋钢丝增强
- 外层: 抗老化 NR 合成橡胶, 耐磨损, 蓝色, 表面布纹
- 工作温度: -30℃ 至 +80℃

适用标准及认证:

- EU 1935/2004
- FDA 21 CFR 177.2600
- 德国法规: BFR 建议第 11 款, 第二节
- 法国相应法规许可

Applications:

Suction and discharge of liquid foodstuffs such as wine, beer, milk, oil, fats, cider, fruit juice, and alcohol up to 96 %. For unloading bays, processing and filling plants, and liquid foodstuff tankers. Additional airline on road tankers carrying bulk powdered products (not compressor line) at temperatures up to + 120 °C.

Advantages:

- A smooth, seamless, white, multipurpose food grade tube that does not propagate bacterial growth
- Flexible and easy to handle
- Excellent resistance to kinking
- Changes in temperature have little effect due to the qualities of the rubber compound.
- Resistant to most cleaning processes used in the food industry, either with chemicals (max, 90 °C) or steam (<max, 130 °C). See our users information leaflet.
- Non-marking, abrasion-resistant cover
- Contains no phthalate

Technical description:

- Inner tube: food grade quality, oil resistant NBR, white, smooth.
- Reinforcement: synthetic textile with embedded steel helix.
- Cover: oil and weather resistant NBR/PVC, blue, fabric impression.
- Temperature range: - 30 °C to + 100 °C.

Standard/Approval:

- EU regulations n° 1935/2004 and 2023/2006.
- FDA regulation 21 CFR 177.2600.
- German legislation: BFR recommendation XXI cat. 2.
- French legislation.

超柔软食品管 A1-003

产品编码 No.	内径 in.	mm	外径 mm	工作压力 bar	爆破压力 bar	耐负压 bar	弯曲半径 mm	重量 kg/m	包装长度 m
A1-003-1000	1"	25.0	36.0	6	18	0.9	50	0.70	40
A1-003-1250	1-1/4"	32.0	43.0	6	18	0.9	64	0.82	40
A1-003-1500	1-1/2"	38.0	49.0	6	18	0.9	76	1.14	40
A1-003-1580	1-9/16"	40.0	51.0	6	18	0.9	80	1.27	13.3-40
A1-003-1690	*	43.0	54.0	6	18	0.9	86	1.34	40
A1-003-1770	*	45.0	56.0	6	18	0.9	90	1.38	40
A1-003-2000	2"	51.0	63.0	6	18	0.9	102	1.79	40
A1-003-2090	*	53.0	65.0	6	18	0.9	106	1.85	40
A1-003-2360	2-3/8"	60.0	72.0	6	18	0.9	120	2.09	40
A1-003-2500	2-1/2"	63.0	75.0	6	18	0.9	126	2.17	40
A1-003-2760	*	70.0	83.5	6	18	0.9	140	2.62	13.3-40
A1-003-3000	3"	76.0	89.5	6	18	0.9	152	3.03	40
A1-003-3150	*	80.0	94.0	6	18	0.9	240	3.04	40
A1-003-3500	3-1/2"	89.0	103.0	6	18	0.9	315	3.39	40
A1-003-4000	4"	100.0	114.0	6	18	0.9	350	3.67	40
A1-003-5000	5"	125.0	145.5	6	18	0.9	450	6.05	10-20
A1-003-6000	6"	150.0	171.5	6	18	0.9	530	7.02	10-20

blueFuture
您身边的工业专家